




**BLOVER**



# Bloverlar

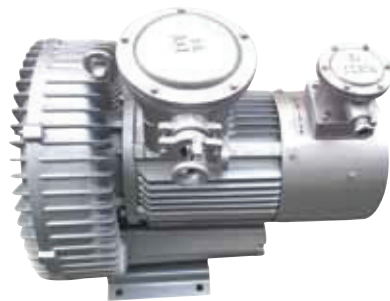



## Monofaze

Model (2XHB)	Kademe	Frekans Hz	Güç KW	Voltaj V	Akım A	Hava Debisi m <sup>3</sup> /s	Vakum mbar	Basınç mbar	Ses Seviyesi dB(A)	Ağırlık Kg
010 A01	Tek	50	0.12	220-240V	1.2	55	-60	60	46	5
		60	0.14	220-240V	1.1	68	-60	60	48	
110 A01	Tek	50	0.20	220-240V	1.43	70	-100	100	48	7
		60	0.23	220-240V	1.3	85	-110	120	50	
210 A01	Tek	50	0.25	220-240V	2.7	80	-120	120	53	9
		60	0.35	220-240V	3.2	98	-140	140	56	
210 A11	Tek	50	0.40	220-240V	2.7	80	-120	130	53	10
		60	0.50	220-240V	3.2	98	-150	160	56	
220 A21	Çift	50	0.70	220-240V	4.5	88	-210	240	55	16
		60	0.83	220-240V	5.6	103	-250	250	61	
310 A01	Tek	50	0.55	220-240V	3.7	95	-120	130	57	13
		60	0.62	220-240V	4.9	110	-120	130	60	
410 A01	Tek	50	0.70	220-240V	4.5	145	-120	120	63	15
		60	0.83	220-240V	5.6	175	-130	130	64	
410 A11	Tek	50	0.85	220-240V	5	145	-160	160	63	16
		60	0.95	220-240V	5.8	175	-160	160	64	
410 A21	Tek	50	1.30	220-240V	7.3	145	-170	200	63	17
		60	1.50	220-240V	7.8	175	-210	220	64	
420 A31	Çift	50	1.50	220-240V	9	150	-260	260	66	28
		60	1.75	220-240V	9.5	180	-300	290	69	
420 A41	Çift	50	2.20	220-240V	10	150	-265	265	66	31
		60	2.55	220-240V	11	180	-310	300	69	
510 A01	Tek	50	0.85	220-240V	5	210	-160	160	64	20
		60	0.95	220-240V	5.8	255	-145	140	70	
510 A11	Tek	50	1.30	220-240V	7.3	210	-170	170	64	22
		60	1.50	220-240V	7.5	255	-150	140	70	
510 A21	Tek	50	1.50	220-240V	9	210	-200	190	64	24
		60	1.75	220-240V	9.5	255	-220	210	70	
510 A31	Tek	50	2.20	220-240V	10	210	-220	270	64	28
		60	2.55	220-240V	11	255	-260	290	70	
520 A41	Çift	50	2.20	220-240V	10	230	-290	360	72	38
		60	2.55	220-240V	11	275	-350	330	74	
610 A01	Tek	50	1.60	220-240V	10	270	-210	230	64	28
		60	2.30	220-240V	11	315	-230	250	70	
610 A11	Tek	50	2.20	220-240V	10	270	-230	250	64	30
		60	2.55	220-240V	11	315	-250	270	70	



## Trifaze

Model (2XHB)	Kademe	Frekans Hz	Güç KW	Voltaj V		Akım A	Hava Debisi m <sup>3</sup> /s	Vakum mbar	Basınç mbar	Ses Seviyesi dB(A)	Ağırlık Kg
010 H06	Tek	50	0.12	200-240Δ	345-415Y	1.0Δ/0.6Y	55	-60	60	46	5
		60	0.14	220-275Δ	380-480Y	1.0Δ/0.6Y	68	-60	60	48	
110 H06	Tek	50	0.20	200-240Δ	345-415Y	1.2Δ/0.8Y	70	-100	100	48	7
		60	0.23	220-275Δ	380-480Y	1.2Δ/0.8Y	85	-110	120	50	
210 H06	Tek	50	0.25	200-240Δ	345-415Y	2.6Δ/1.5Y	80	-110	120	53	9
		60	0.35	220-275Δ	380-480Y	2.6Δ/1.5Y	98	-140	140	56	
210 H16	Tek	50	0.40	200-240Δ	345-415Y	2.6Δ/1.5Y	80	-120	130	53	10
		60	0.50	220-275Δ	380-480Y	2.6Δ/1.5Y	98	-150	160	56	
220 H26	Çift	50	0.70	200-240Δ	345-415Y	3.8Δ/2.2Y	88	-210	240	55	15
		60	0.83	220-275Δ	380-480Y	3.75Δ/2.15Y	102	-250	250	61	
310 H06	Tek	50	0.55	200-240Δ	345-415Y	2.8Δ/1.6Y	100	-110	120	55	11
		60	0.62	220-275Δ	380-480Y	3.0Δ/1.7Y	120	-110	120	57	
320 H26	Çift	50	0.85	200-240Δ	345-415Y	4.2Δ/2.4Y	110	-200	230	58	17
		60	0.95	220-275Δ	380-480Y	4.0Δ/2.3Y	130	-240	240	60	
320 H36	Çift	50	1.30	200-240Δ	345-415Y	5.7Δ/3.3Y	110	-280	290	58	18
		60	1.50	220-275Δ	380-480Y	6.0Δ/3.5Y	130	-300	400	60	
410 H06	Tek	50	0.70	200-240Δ	345-415Y	3.8Δ/2.2Y	145	-120	120	63	15
		60	0.83	220-275Δ	380-480Y	3.75Δ/2.15Y	175	-140	140	64	
410 H16	Tek	50	0.85	200-240Δ	345-415Y	3.85Δ/2.25Y	145	-160	160	63	17
		60	0.95	220-275Δ	380-480Y	4.0Δ/2.3Y	175	-160	160	64	
410 H26	Tek	50	1.30	200-240Δ	345-415Y	5.7Δ/3.3Y	145	-170	200	63	18
		60	1.50	220-275Δ	380-480Y	6.0Δ/3.5Y	175	-210	220	64	
420 H36	Çift	50	1.60	200-240Δ	345-415Y	7.5Δ/4.3Y	150	-280	280	66	25
		60	2.05	220-275Δ	380-480Y	7.6Δ/4.4Y	180	-320	310	69	
420 H46	Çift	50	2.20	200-240Δ	345-415Y	9.7Δ/5.6Y	150	-330	420	66	27
		60	2.55	220-275Δ	380-480Y	10Δ/5.8Y	180	-350	440	69	
510 H06	Tek	50	0.85	200-240Δ	345-415Y	4.2Δ/2.3Y	210	-160	170	64	20
		60	0.95	220-275Δ	380-480Y	4.0Δ/2.3Y	255	-150	160	70	
510 H16	Tek	50	1.30	200-240Δ	345-415Y	6.6Δ/3.8Y	210	-170	170	64	22
		60	1.50	220-275Δ	380-480Y	6.9Δ/4.0Y	255	-180	190	70	
510 H26	Tek	50	1.60	200-240Δ	345-415Y	7.5Δ/4.3Y	210	-200	190	64	23
		60	2.10	220-275Δ	380-480Y	7.6Δ/4.4Y	255	-220	210	70	
510 H36	Tek	50	2.20	200-240Δ	345-415Y	9.7Δ/5.6Y	210	-220	270	64	27
		60	2.55	220-275Δ	380-480Y	10.3Δ/6.0Y	255	-260	290	70	
520 H36	Çift	50	2.20	200-240Δ	345-415Y	9.7Δ/5.6Y	230	-290	360	72	35
		60	2.55	220-275Δ	380-480Y	10.3Δ/6.0Y	275	-350	330	74	
520 H46	Çift	50	3.00	200-240Δ	345-415Y	12.5Δ/7.2Y	230	-340	410	72	39
		60	3.45	220-275Δ	380-480Y	12.6Δ/7.3Y	275	-380	360	74	
520 H57	Çift	50	4.00	345-415Δ	600-720Y	10Δ/5.8Y	230	-390	490	72	44
		60	4.60	380-480Δ	660-720Y	9.9Δ/5.71Y	275	-410	480	74	
610 H06	Tek	50	1.60	200-240Δ	345-415Y	8.5Δ/4.9Y	265	-170	190	68	25
		60	2.10	220-275Δ	380-480Y	8.8Δ/5.5Y	315	-200	190	70	
610 H16	Tek	50	2.20	200-240Δ	345-415Y	9.7Δ/5.6Y	265	-235	220	69	28
		60	2.50	220-275Δ	380-480Y	10.3Δ/6.0Y	315	-245	230	72	
610 H26	Tek	50	3.00	200-240Δ	345-415Y	12.5Δ/7.2Y	265	-280	280	69	32
		60	3.45	220-275Δ	380-480Y	12.6Δ/7.3Y	315	-260	270	72	
630 H06	Tek	50	1.60	200-240Δ	345-415Y	8.5Δ/4.9Y	345	-125	125	70	26
		60	2.05	220-275Δ	380-480Y	8.8Δ/5.1Y	415	-105	130	73	
630 H16	Tek	50	2.20	200-240Δ	345-415Y	9.7Δ/5.6Y	345	-200	195	70	29
		60	2.55	220-275Δ	380-480Y	10.3Δ/6.0Y	415	-170	195	73	






## Trifaze

Model (2XHB)	Kademe	Frekans Hz	Güç KW	Voltaj V		Akım A	Hava Debisi m3/s	Vakum mbar	Basınç mbar	Ses Seviyesi dB(A)	Ağırlık Kg
630 H26	Tek	50	3.00	200-240Δ	345-415Y	12.5Δ/7.2Y	345	-240	220	70	35
		60	3.45	220-275Δ	380-480Y	12.6Δ/7.3Y	415	-210	220	73	
710 H06	Tek	50	1.6	200-240Δ	345-415Y	7.5Δ/4.3Y	318	-180	180	69	31
		60	2.1	220-275Δ	380-480Y	7.6Δ/4.4Y	376	-180	180	72	
710 H16	Tek	50	2.2	200-240Δ	345-415Y	9.7Δ/5.6Y	318	-180	190	69	31
		60	2.55	220-275Δ	380-480Y	10.3Δ/6.5Y	376	-190	190	72	
710 H26	Tek	50	3.00	200-240Δ	345-415Y	12.5Δ/7.2Y	318	-270	270	69	36
		60	3.45	220-275Δ	380-480Y	12.5Δ/7.3Y	376	-250	230	72	
710 H37	Tek	50	4.00	345-415Δ	600-720Y	9.0Δ/5.2Y	318	-290	360	69	40
		60	4.60	380-480Δ	660-720Y	9.4Δ5.2Y	376	-320	310	72	
710 H47	Tek	50	4.30	345-415Δ	600-720Y	9.5Δ/5.5Y	318	-295	335	69	43
		60	4.80	380-480Δ	660-720Y	9.5Δ/5.5Y	376	-335	335	72	
730 H16	Tek	50	2.20	200-240Δ	345-415Y	9.7Δ/5.6Y	420	-180	170	70	32
		60	2.55	220-275Δ	380-480Y	10.3Δ/6.5Y	500	-160	150	73	
730 H26	Tek	50	3.00	200-240Δ	345-415Y	12.5Δ/7.2Y	420	-220	200	70	37
		60	3.45	220-275Δ	380-480Y	12.5Δ/7.3Y	500	-200	170	73	
730 H37	Tek	50	4.00	345-415Δ	600-720Y	9.0Δ/5.2Y	420	-260	280	70	43
		60	4.60	380-480Δ	660-720Y	9.4Δ5.2Y	500	-260	260	73	
730 H47	Tek	50	4.30	345-415Δ	600-720Y	9.5Δ/5.5Y	420	-265	290	70	45
		60	4.80	380-480Δ	660-720Y	9.5Δ/5.5Y	500	-270	270	73	
720 H26	Çift	50	3.00	200-240Δ	345-415Y	12.5Δ/7.2Y	320	-280	260	73	49
		60	3.45	220-275Δ	380-480Y	12.6Δ/7.3Y	380	-230	200	76	
720 H27	Çift	50	4.00	345-415Δ	600-720Y	9.0Δ/5.2Y	320	-355	375	73	53
		60	4.60	380-480Δ	660-720Y	9.4Δ/5.2Y	385	-345	315	76	
720 H37	Çift	50	4.30	345-415Δ	600-720Y	10Δ/5.2Y	320	-360	380	73	56
		60	4.80	380-480Δ	660-720Y	10.4Δ/6.0Y	380	-350	320	76	
720 H47	Çift	50	5.50	345-415Δ	600-720Y	13.3Δ/7.7Y	320	-440	500	73	70
		60	6.30	380-480Δ	660-720Y	13.3Δ/7.7Y	385	-440	500	76	
720 H57	Çift	50	7.50	345-415Δ	600-720Y	16.7Δ/9.6Y	320	-440	570	73	74
		60	8.60	380-480Δ	660-720Y	17.3Δ/10.0Y	380	-460	660	76	
740 H27	Çift	50	3.00	200-240Δ	345-415Y	12.5Δ/7.2Y	500	-130	120	74	50
		60	3.45	220-275Δ	380-480Y	12.6Δ/7.3Y	600	-100	80	78	
740 H37	Çift	50	4.00	345-415Δ	600-720Y	9.0Δ/5.2Y	500	-150	140	74	54
		60	4.60	380-480Δ	660-720Y	9.0Δ/5.2Y	600	-100	90	78	
740 H47	Çift	50	5.50	345-415Δ	600-720Y	13.3Δ/7.7Y	500	-240	260	74	69
		60	6.30	380-480Δ	660-720Y	13.3Δ/7.7Y	600	-210	200	78	
740 H57	Çift	50	7.50	345-415Δ	600-720Y	16.7Δ/9.6Y	500	-240	320	74	75
		60	8.60	380-480Δ	660-720Y	17.3Δ/10.0Y	600	-270	300	78	
810 H07	Tek	50	4.30	345-415Δ	600-720Y	9.5Δ/5.5Y	530	-200	200	70	51
		60	4.60	380-480Δ	660-720Y	9.5Δ/5.5Y	620	-160	160	74	
810 H17	Tek	50	5.50	345-415Δ	600-720Y	12.9Δ/7.4Y	530	-300	320	80	62
		60	6.30	380-480Δ	660-720Y	12.9Δ/7.45Y	620	-320	340	82	
810 H27	Tek	50	7.50	345-415Δ	600-720Y	16.7Δ/9.6Y	530	-320	380	80	65
		60	8.60	380-480Δ	660-720Y	17.3Δ/10.0Y	620	-350	400	82	
830 H07	Tek	50	4.30	345-415Δ	600-720Y	9.5Δ/5.5Y	700	-150	140	70	57
		60	4.80	380-480Δ	660-720Y	9.5Δ/5.5Y	840	-190	190	74	
830 H17	Tek	50	5.50	345-415Δ	600-720Y	12.9Δ/7.4Y	700	-200	180	70	66
		60	6.30	380-480Δ	660-720Y	12.9Δ/7.45Y	840	-180	180	74	
830 H27	Tek	50	7.50	345-415Δ	600-720Y	16.7Δ/9.6Y	700	-270	260	70	69
		60	8.60	380-480Δ	660-720Y	17.3Δ/10.0Y	840	-270	260	74	



## Trifaze

Model (2XHB)	Kademe	Frekans Hz	Güç KW	Voltaj V	Akım A	Hava Debisi m3/s	Vakum mbar	Basınç mbar	Ses Seviyesi dB(A)	Ağırlık Kg	
820 H17	Çift	50	5.50	345-415Δ	600-720Y	13.3Δ/7.7Y	520	-240	240	74	83
		60	6.30	380-480Δ	660-720Y	13.3Δ/7.7Y	620	-170	160	78	
820 H27	Çift	50	7.50	345-415Δ	600-720Y	16.7Δ/9.6Y	520	-400	400	74	88
		60	8.60	380-480Δ	660-720Y	17.3Δ/10.0Y	620	-360	330	78	
820 H37	Çift	50	11.00	345-415Δ	600-720Y	28.0Δ/16.2Y	520	-430	660	74	104
		60	12.60	380-480Δ	660-720Y	29.0Δ/16.7Y	620	-460	600	78	
820 H47	Çift	50	15.00	345-415Δ	600-720Y	32.5Δ/18.8Y	520	-460	670	74	120
		60	17.30	380-480Δ	660-720Y	34.5Δ/19.9Y	620	-490	750	78	
840 H17	Çift	50	5.50	345-415Δ	600-720Y	13.3Δ/7.7Y	900	-180	160	74	88
		60	6.30	380-480Δ	660-720Y	13.3Δ/7.7Y	1050	-130	120	78	
840 H27	Çift	50	7.50	345-415Δ	600-720Y	16.7Δ/9.6Y	900	-200	180	74	91
		60	8.60	380-480Δ	660-720Y	17.3Δ/10.0Y	1050	-150	120	78	
840 H37	Çift	50	11.00	345-415Δ	600-720Y	28.0Δ/16.2Y	900	-280	370	74	110
		60	12.60	380-480Δ	660-720Y	29.0Δ/16.7Y	1050	-310	350	78	
910 H07	Tek	50	8.5	345-415Δ	600-720Y	18.2Δ/10.5Y	1050	-190	190	74	93
		60	9.8	380-480Δ	660-720Y	18.2Δ/10.5Y	1250	-150	140	79	
910 H17	Tek	50	12.5	345-415Δ	600-720Y	28.0Δ/16.2Y	1050	-290	-280	74	116
		60	14.5	380-480Δ	660-720Y	29.0Δ/16.7Y	1250	-270	260	79	
910 H37	Tek	50	18.5	345-415Δ	600-720Y	37.0Δ/21.0Y	1050	-360	460	74	126
		60	21.3	380-480Δ	660-720Y	39.0Δ/22.5Y	1250	-380	420	79	
920 H17	Çift	50	12.5	345-415Δ	600-720Y	28.0Δ/16.2Y	1110	-300	270	74	187
		60	14.5	380-480Δ	660-720Y	29.0Δ/16.7Y	1310	-220	200	78	
920 H27	Çift	50	16.5	345-415Δ	600-720Y	35.0Δ/20.0Y	1110	-410	370	74	197
		60	19.0	380-480Δ	660-720Y	36.5Δ/21.0Y	1310	-340	300	78	
920 H37	Çift	50	20.0	345-415Δ	600-720Y	40.0Δ/23.0Y	1110	-440	500	74	204
		60	23.0	380-480Δ	660-720Y	42.0Δ/24.2Y	1310	-440	430	78	
920 H47	Çift	50	25.0	345-415Δ	600-720Y	52.0Δ/30.0Y	1110	-440	590	74	211
		60	29.0	380-480Δ	660-720Y	52.0Δ/30.0Y	1310	-440	540	78	
920 H57	Çift	50	30.0	345-415Δ	600-720Y	60.0Δ/35.0Y	1110	-440	660	74	218
		60	35.0	380-480Δ	660-720Y	60.0Δ/35.0Y	1310	-440	620	78	
930 H07	Tek	50	8.5	345-415Δ	600-720Y	18.2Δ/10.5Y	1370	-120	110	75	98
		60	9.8	380-480Δ	660-720Y	18.2Δ/10.5Y	1650	-140	140	80	
930 H17	Tek	50	12.5	345-415Δ	600-720Y	28.0Δ/16.2Y	1370	-190	180	75	121
		60	14.5	380-480Δ	660-720Y	29.0Δ/16.7Y	1650	-150	150	80	
930 H37	Tek	50	18.5	345-415Δ	600-720Y	37.0Δ/21.0Y	1370	-310	320	75	131
		60	21.3	380-480Δ	660-720Y	39.0Δ/22.5Y	1650	-300	280	80	
940 H27	Çift	50	15.0	345-415Δ	600-720Y	35.0Δ/20.0Y	1940	-130	110	75	187
		60	17.5	380-480Δ	660-720Y	36.5Δ/21.0Y	2310	-150	150	84	
940 H37	Çift	50	20.0	345-415Δ	600-720Y	40.0Δ/23.0Y	1940	-220	200	75	212
		60	23.0	380-480Δ	660-720Y	42.0Δ/24.2Y	2310	-160	130	84	
940 H47	Çift	50	25.0	345-415Δ	600-720Y	52.0Δ/30.0Y	1940	-310	280	75	219
		60	29.0	380-480Δ	660-720Y	52.0Δ/30.0Y	2310	-270	220	84	
940 H57	Çift	50	30.0	345-415Δ	600-720Y	60.0Δ/35.0Y	1940	-380	350	75	225
		60	35.0	380-480Δ	660-720Y	60.0Δ/35.0Y	2310	-340	320	84	
943 H27	Çift	50	15.0	345-415Δ	600-720Y	35.0Δ/20.0Y	2050	-160	170	75	220
		60	17.5	380-480Δ	660-720Y	36.5Δ/21.0Y	2480	-120	110	84	
943 H37	Çift	50	20.0	345-415Δ	600-720Y	40.0Δ/23.0Y	2050	-250	230	75	230
		60	23.0	380-480Δ	660-720Y	42.0Δ/24.2Y	2480	-190	180	84	
943 H47	Çift	50	25.0	345-415Δ	600-720Y	52.0Δ/30.0Y	2050	-310	280	75	235
		60	29.0	380-480Δ	660-720Y	52.0Δ/30.0Y	2480	-270	230	84	
943 H57	Çift	50	30.0	345-415Δ	600-720Y	60.0Δ/35.0Y	2050	-380	350	75	240
		60	35.0	380-480Δ	660-720Y	60.0Δ/35.0Y	2480	-340	320	84	

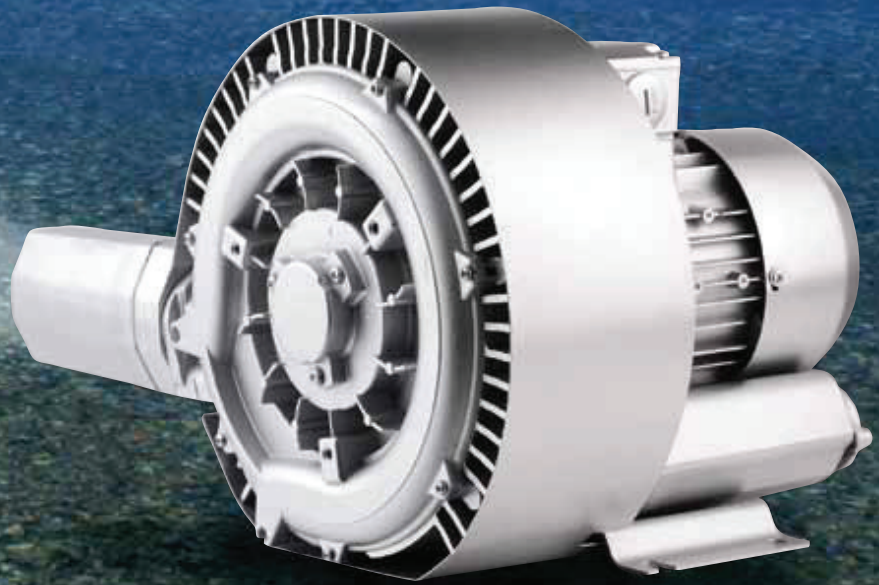



# POOL TECHNOLOGY

