



**GEMAS POOL DIRECTOR
WITH DOSING PUMPS
(Automatic pH-Redox Controller)
TECHNICAL DATA SHEET**



"Pool Technology"

Complete with electrodes, electrode cable, flow cell, on-line strainer and buffer solutions. All assembled on a 60 x 75cm plastic panel. Operation instructions are mentioned and a space for assembling of the metering pump is reserved on the panel. Dosing pumps excluded.

Technical Features:

- Microcontroller technology
- Touch-operated keypad
- ON-OFF and rational operation modes can be selected for pH and ORP separately
- Automatic calibration with closed calibration solution
- Optional heat sensor
- Optional dosing pump level control
- Optional flow switch for flow control
- RS232 or RS485 outlets for optional DATA transfer

Dosing Pumps:


Membrane type. Analogue. Manually adjustable from %10 to %100.

Description	Code	Weight (kg)	Volume (m ³)
2 lt/h-11 bar	06MD0211	3,092	0,009
3 lt/h – 9 bar	06MD0309	3,092	0,009
5 lt/h – 8 bar	06MD0508	3,092	0,009
8 lt/h – 4 bar	06MD0804	3,092	0,009
10 lt/h – 2 bar	06MD1002	3,092	0,009
15 lt/h – 2 bar	06MD1502	3,092	0,009



Part List:

"Pool Technology"

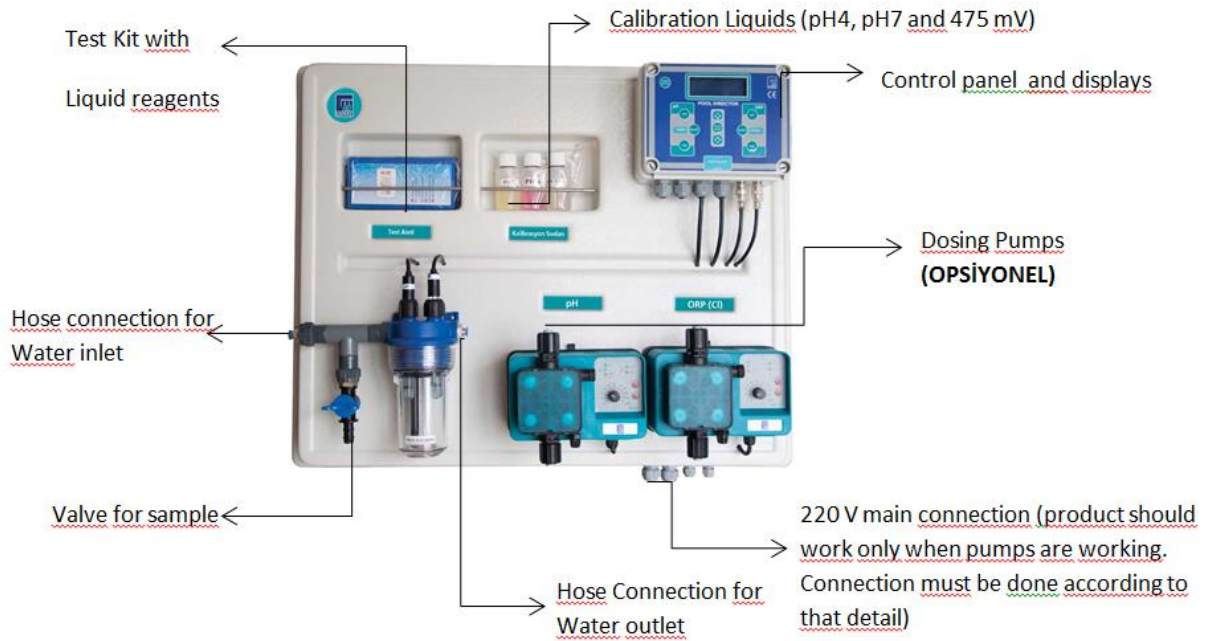

Loading Scheme:

