
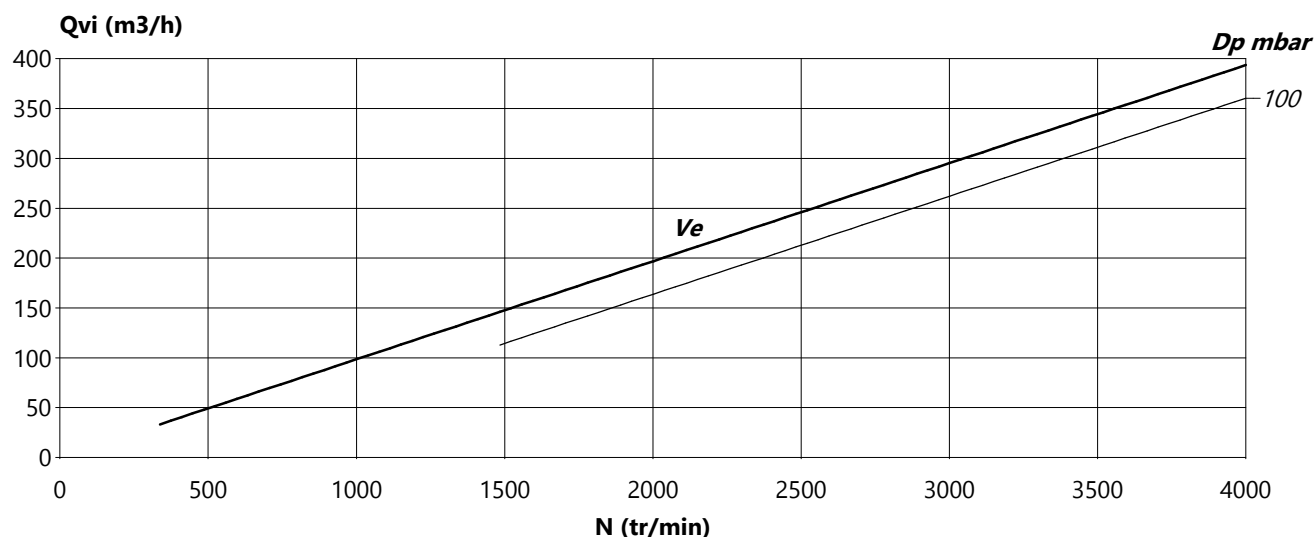
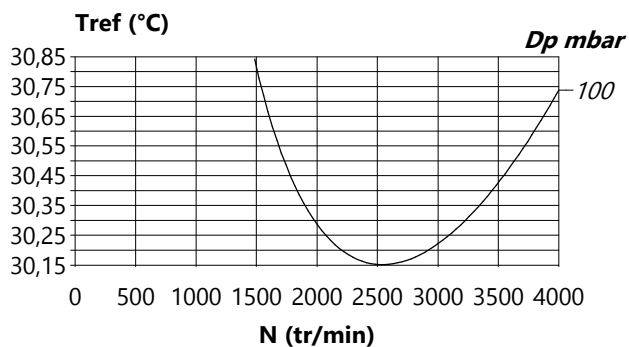


## Pressure Operation

$Q_{vi}$  Inlet volume  
 $P_{abs}$  Blower shaft power  
 $V_e$  Displacement  
 $T_{ref}$  Outlet temperature  
 $D_p$  Blower differential pressure  
 $N$  Speed

These curves are valid for : air  
 $M=29$  g/mol,  $C_p=1010$  J/kg/K,  $d=1,2$  kg/m<sup>3</sup>  
 at 20 °C and inlet pressure : 1013,25 mbar  
 Tolerance : +/- 5 %

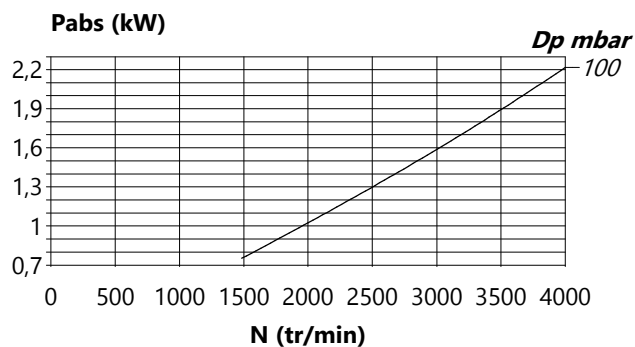

## Hibon Blower

# S2H32 SF0+ 80

**Pressure drop included**



**Ingersoll Rand Air Solutions Hibon**

2, avenue Jean-Paul Sartre  
 59290 WASQUEHAL Cedex - France  
 tel : +33 (0)3.20.45.39.39  
 fax : +33 (0)3.20.45.39.97  
 e-mail : hibon@eu.irco.com

24.03.2020

03.20 v.9.05.61P