






SIDE CHANNEL BLOWERS

BL 030 001 – Single Impeller - Single & Three Phase



Construction of the ring blowers fans is based on the lateral ducts principle. The blowers can operate as either exhaust or compression fans and are designed for continuous service. The device is assembled directly on the motor shaft; all the rotating parts are dynamically balanced to ensure absolute absence of vibration. Full die-cast aluminum construction for maximum sturdiness and ease of handling. The characteristics data given here refer to the handling of gas with inlet temperature of 15°C, normal density of 1,23 kg/m³ and absolute pressure of 1023 mbar. Tolerance of ±10%.

Model	Freq. [Hz]	Power [kW]	Voltage [V]		Rated Current [A]		Max Airflow [m ³ /h]	Rated VACUUM [mbar]	Rated COMPRESSOR [mbar]	Noise [dB A]	Weight [kg]
			△	Y	△	Y					
BL03000100500	50	0.55	200÷240	345÷415	2.8	1.6	100	-110	120	55	11
	60	0.63	220÷275	380÷480	3.0	1.7	120	-110	120	57	
BL030001M0500	50	0.55	220÷240		3.7		95	-120	130	57	13
	60	0.62			4.9		110	-120	130	60	

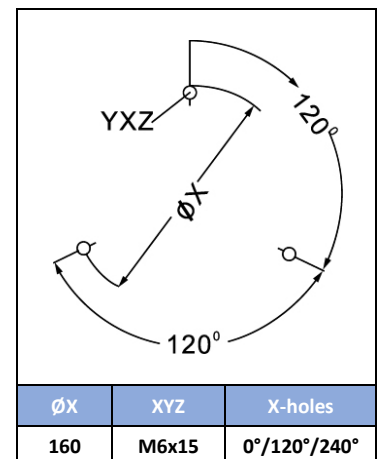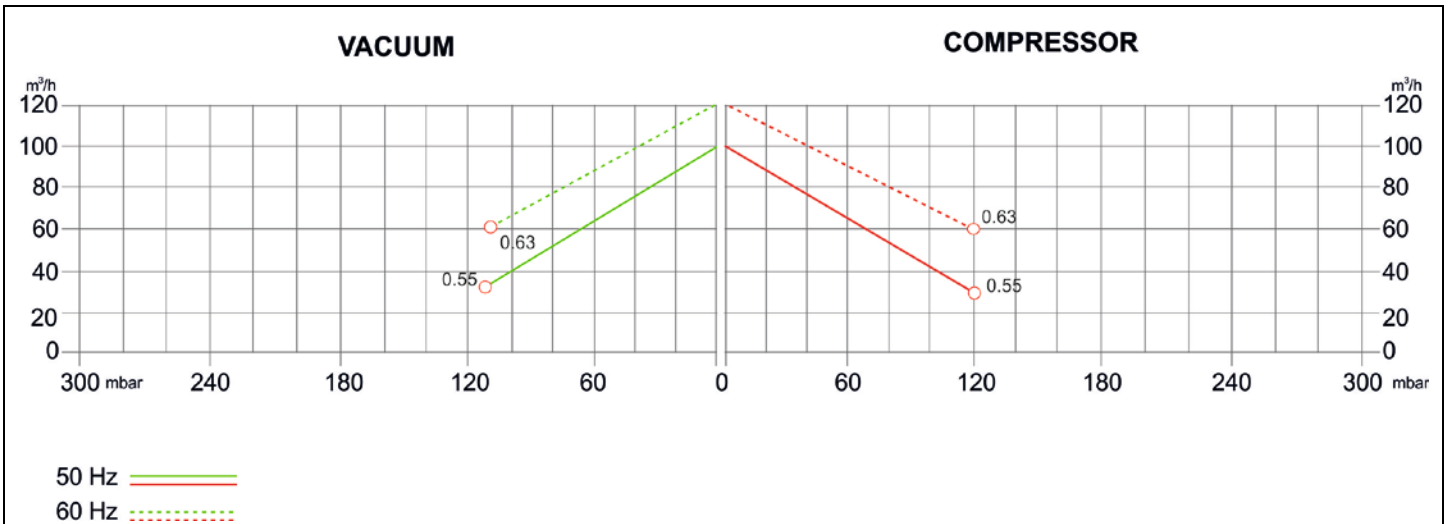

MODEL	A	B	C	D	E	F	G	H	J	K	L	M	N	O	P	Q	ØR	S	U	(1~)		(3~)	
																				V	V'	V1	V1'
BL03000100500	268	272	93	205	230	260	92	141	101	83	108	82	69	41	G1¼	64	10	3	M6x17			M25x1.5	M16x1.5
BL030001M0500	268	272	93	205	230	260	92	141	101	83	108	82	69	41	G1¼	64	10	3	M6x17	M25x1.5	M16x1.5		

Your Choice,
Our Commitment



Ertek Yapı ve Makina Endüstri Ekipmanları San. ve Tic. Ltd. Şti.
Halkapınar Mah. Pamuk Plaza İş Merkezi 1082 Sokak No: 3 M 35170 Yenişehir Konak / İZMİR
Tel: (0232) 469 43 53 Faks: (0232) 457 46 51 • www.ertek.com • info@ertek.com

