



KONTROL 40

The Kontrol 40 series are single parameter controllers. These very user-friendly systems combine advanced performance and simple design. Single-parameter units are available in four different casings, ensuring perfect fit at the right price.

TECHNICAL CHARACTERISTICS

Graphic display and Keypad

Simultaneous value of the measure, Temperature and Relay status. 2-line, 16 character Alphanumeric Display. Four control keys for instrument calibration and configuration.

Enclosure Box and Power Supply

Four (4) mechanical box:

Wall mounting PP (IP65)

Panel mounting: 96x96 IP65 Front panel; 48x96 IP40; Din-Rail (6 modul) IP40

Universal Power Supply 100÷240 Vac 50/60 Hz and 24Vac/dc

Measure Input

High measuring resolution with probe quality control. A modular measuring system Chlorine measure in sea water application.

Current outputs 4÷20mA Galvanic isolation

One independent programmable Output Measures

Relay Outputs

Two (2) independent function, two Set point Measure, dry contact. Software-set alarm functions.

Routine function settings : ON/OFF, Timed or proportional

Digital Input

Dedicated and level input to disable all controller output functions.

APPLICATIONS

- Waste water
- Legionella disinfection
- Sea water
- Crate wash
- CIP
- Dioxide station
- Drinking water
- Cooling towers
- Boilers
- Reverse osmosis



- Galvanic process
- Swimming pool

- Irrigation

PRODUCTS KEY

S Instrument									
S	CD	Conductivity							
	FX	Flow rate							
	CL	Potentiostatic Chlorine							
	PR	pH/Orp and pH/Orp							
		040	Kontrol 40						
			D	Box type DIN					
			Q	box type 48x96					
			P	box type 96X96					
			L	box type 144X144					
			W	box type 144X144 (IP65)					
				A	230 Vac				
				B	24 Vac				
				C	115 Vac				
				M	Switching 80÷265 Vac				
					0	FREE/CUSTOM			
						0	FREE/CUSTOM		
							0	FREE/CUSTOM	
								0	FREE/CUSTOM
S	CD	040	W	A	0	0	0	0	

PRODUCT LINE



	Ph/ORP	conductivity	Chlorine amperometric cell	Chlorine potentiostatic cell	Flow rate
SPR040	•				
SCD040		•			
SCL040				•	
SFX040					•

MEASURE RANGE




Measure	Description	Accuracy
pH	0 ÷ 14,00 pH	±0,1pH
ORP	±1500 mV	±5 mV
Conductivity	1÷50.000 µS	±5%
Flow Rate	0,00÷99.999 Liters/Sec.	±0,5Hz
Chlorine	0,00÷200.00 ppm	±0,01ppm
Temperature	0÷100°C (-32÷212 °F ±1,8°F)	±1,0°C

DIMENSIONS



Din rail IP40

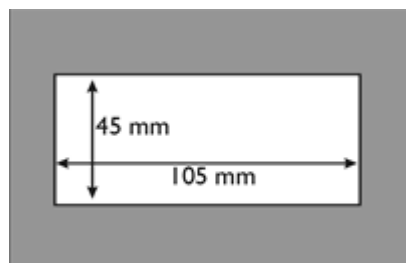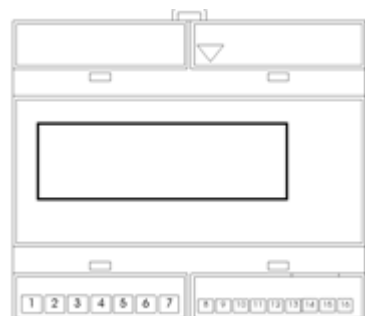




96x96 IP65 Panel



48x96 Panel version

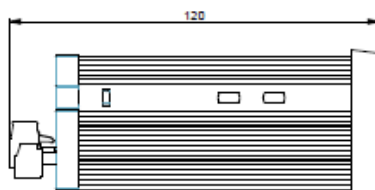

Wall mounting IP65



seko



ERTEK
www.ertek.com

Ertek Yapı ve Makina Endüstri Ekipmanları San. ve Tic. Ltd. Şti.
Halkapınar Mah. Pamuk Plaza İş Merkezi 1082 Sokak No: 3 M 35170
Yenişehir Konak / İZMİR Tel: (0232) 469 43 53 Faks: (0232) 457 46 51
www.ertek.com • info@ertek.com

