



Features:

- Low maintenance sealed unit
- Gel filled reference cell
- S8 connection with PG 13,5 mm
- Glass Body
- Diaphragm open hole

Field Application:

- Wast water
- Drinking Water
- Cooling Towers
- Fish farming
- Galvanic Process


• Features:

- Range: pH 0÷14
- Temperature: 0÷80 °C
- Pressure: 6 Bar
- Trasparten glass Body
- **Double junction** with KCL Gel and **one open hole**.
- S8 connector: PG13,5 mm mechanical connection and S7 electrical connection.
- Batch production number.
- Single Package with neutral carton box.
- Neutral Label.

TECHNICAL CHARACTERISTICS

pH Range:	0 ÷ 14
Min. Conductivity:	5 µS/cm
Temp. Range:	80° C
Pressure Range:	up to 6 bar
Body material:	Glass
Diaphragm material:	Glass
Diaphragm type:	1 open hole
Mechanical Mounting:	PG 13.5 mm
Electrical Connection:	S7 electrical connection
Reference:	GEL
Storage temperature	+2 ÷ 50 °C (do not freeze)

DIMENSIONS

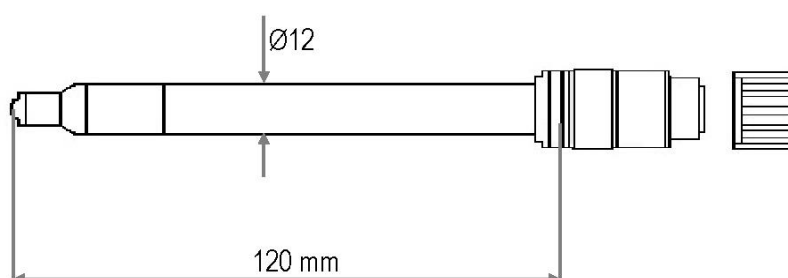

seko



ERTEK
www.ertek.com

Ertek Yapı ve Makina Endüstri Ekipmanları San. ve Tic. Ltd. Şti.
Halkapınar Mah. Pamuk Plaza İş Merkezi 1082 Sokak No: 3 M 35170
Yenişehir Konak / İZMİR Tel: (0232) 469 43 53 Faks: (0232) 457 46 51
www.ertek.com • info@ertek.com

